

## Exercise Sheet 8

### Assignment 8.1 Quiz

1. Is every class associated with a unique virtual table? What about virtual subtables?
2. Given the following C++ classes:


```
class E          { public: virtual void f(E*); };
class D          { public: virtual void f(E*); };
class C : virtual E { public: virtual void f(E*); };
class B : D      { public: virtual void f(E*); };
class A : B,C    { public: virtual void f(E*); };
```

Assuming the existence of implementations of each instance of `f`, which of the following calls involve a *virtual thunk*?

- A a; E\* e = &a; a.f(e);
- A a; E\* e = &a; e->f(&a);
- A a; C\* c = &a; a.f(c);
- A a; C\* c = &a; c->f(&a);
- A a; B\* b = &a; b->f(&a);

3. Complete the object representation and virtual table diagrams given the following:

```
class A { public: int a; virtual void f(); }
class D : public A, public virtual V { public: int d; virtual void f(); }
class V { public: int v; virtual void f(); }
```

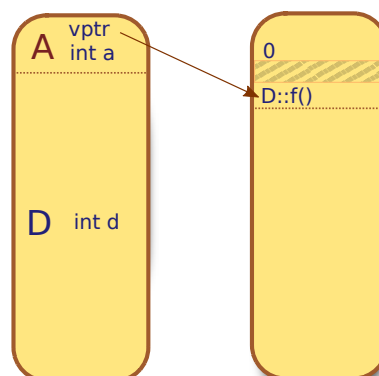

4. Consider the following code (note: shared base class):

```

class A { };
class B : public virtual A { };
class C : public virtual A { };
class D : public B, public C { };
...
C c; A* a = &c; (C*)a;

```

Is the cast correct?

## Assignment 8.2 Multiple Inheritance

This C++ code defines a few classes:

```

1 class A {
2 public:
3     int a;
4     virtual int f(int);
5     virtual int g(int);
6 };
7 class B : public A {
8 public:
9     int b;
10    int f(int);
11    virtual int h(int);
12 };
13 class C : virtual public A {
14 public:
15     int c;
16     int f(int);
17 };
18 class D: public C, B {
19 public:
20     int d;
21     int f(int);
22 };

```

This is the Virtual Table for class D:

Entry	Value
0	vbase_offset (40)
1	offset_to_top (0)
2	D RTTI
3	int D::f(int)
4	offset_to_top (-16)
5	D RTTI
6	int D::f(int)
7	int A::g(int)
8	int B::h(int)
9	vcall_offset (0)
10	vcall_offset (-40)
11	offset_to_top (-40)
12	D RTTI
13	int D::f(int)
14	int A::g(int)

1. Draw the layout for a class D object memory representation!
2. For each `vp_ptr`-attribute in your drawing, give the *entry number* to which `Vtable`-entry this pointer is pointing.
3. D's virtual table is composed of several subtables. Your object memory representation is also composed of several parts, corresponding to particular subclasses.  
For each subclass part of your memory representation, give the *entry numbers*, where the corresponding subtable within D's virtual table *starts* and *ends*.
4. Thunks were not highlighted in the virtual table. Compare the entries 3, 6 and 13 in the virtual table. Which of them are thunks, which are virtual thunks, and which are direct addresses of `D::f(int)`?

### Assignment 8.3 Multiple Inheritance I

Provide a C++ class structure and a main function, which fails to compile, due to multiple inheritance causing

1. ... an ambiguously resolvable call expression
2. ... ambiguous casting target types

### Assignment 8.4 Multiple Inheritance II

In this assignment, we program an interpreter for C++-Classes. The following C++-instruction sequence is our main concern; from that, we generate the corresponding Java-code to be interpreted with our framework:

```
C* pc = new C();
A* pa = pc;
pa->f();
⇒
// C* pc = new C();
Type C = Type.getTypeFor("C");
Pointer pc = Pointer.malloc(C.getSize());
C.getConstructor().callDirect(pc);
// A* pa = pc;
Pointer pa = C.castPointerTo(pc, "A");
// pa->f();
C.callVirtual(pa, "f");
```

The signatures of the Java-Classes/Interfaces used in this generated code can be found in the **Appendix**.

1. Consider the following C++-Classes:

```
class A          { public: int a; virtual void f(); }
class B : public A { public: int b; virtual void f(); }
class C : public B { public: int c; virtual void f(); }
```

Draw a memory representation diagram for a C-Object, and the virtual table diagram for class C!

2. Give implementations of the methods `castPointerTo` and `callVirtual` for the type corresponding to `C` from directly above, that matches with the code generation and the representation/vtable layout that you have determined above!
3. Consider the following C++-Classes:

```
class A          { public: int a; virtual void f(); }
class B          { public: int b; virtual void f(); }
class C : public B, public A { public: int c; virtual void f(); }
```

Draw a memory representation diagram for a C-Object, and the virtual table diagram for class C!

4. Give implementations of the methods `castPointerTo` and `callVirtual` for the type corresponding to `C` from directly above, that matches with the code generation and the representation/vtable layout that you have determined above!
5. One of the above virtual tables has a *thunk* as implementation for `f`. Which one? Provide an implementation of the interface method `Method::callDirect`, that performs the necessary actions in our framework, such that it is compatible with your representation/vtable layout.

## Appendix for Assignment 4:

Let the following Java-Interfaces be given as an API for the runtime components of our interpreter:

```
interface Type {
    /** obtain an object, representing the type denoted by the name t */
    default Type getTypeFor(String t) { ... }
    /** perform a virtual method call to method m on p with params ps */
    Object callVirtual(Pointer p,String m, Object... ps);
    /** returns a pointer to the cast target c wrt. the current type/pointer */
    Pointer castPointerTo(Pointer p,String c);
    /** obtain the constructor for the type, given there is one */
    Method getConstructor();
    /** obtain the size in bytes for the type */
    default int getSize() { ... }
}

public class Pointer {
    /** obtains fresh memory from the heap */
    public static Pointer malloc(int sizeInBytes) { ... }
    /** pointerarithmetics; add/sub returns the modified pointer
     * without changing this
     */
    public Pointer add(int offset) { ... }
    public Pointer sub(int offset) { ... }
    /** derefenciate the pointer and return whatever is found in the memory
     * you still need to cast to whatever is expected to be found there */
    public Object deref() { ... }
}

interface Method { // implementations are given by the framework
    Object callDirect(Pointer receiver, Object... parameters) { ... }
}
```